


RoHS Compliant

REVISION: 01

UNIT: mm

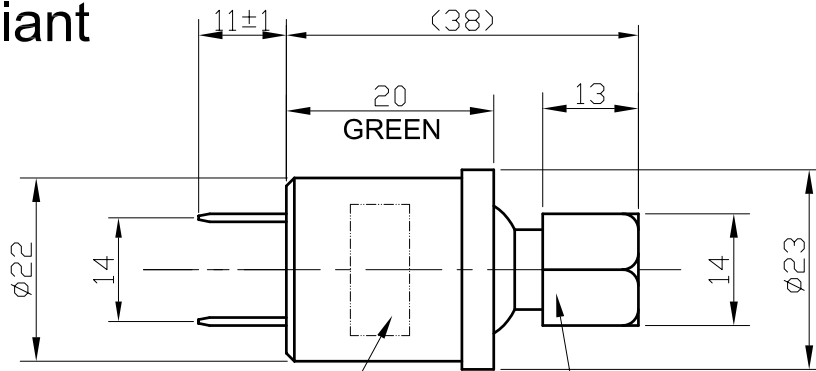

LABEL

1/4" Female Flare Fitting
W/core depressor

YK-01H 000-363R261R
 OPEN: 363 ± 15 PSI
 CLOSE: 261 ± 15 PSI
 XXXXXX CHANG HENG

DATE CODE

TECHNICAL SPECIFICATIONS

ACTUATION/OPEN PRESSURE	-----	363 ± 15 PSI (25BAR)												
RELEASE/CLOSE PRESSURE	-----	261 ± 15 PSI (18BAR)												
PROOF PRESSURE	-----	600PSI												
BURST PRESSURE	-----	5000PSI												
TEMPERATURE RANGE	-----	Ambient: -30°C to +80°C Fluid: -50°C to +120°C												
ELECTRICAL RATING	-----	50/60Hz, 36VDC, 3A												
		<table border="0"> <tr> <td>Voltage</td> <td>Amperage</td> <td></td> </tr> <tr> <td>24</td> <td>125VA</td> <td>pilot duty</td> </tr> <tr> <td>120</td> <td>375VA</td> <td>pilot duty</td> </tr> <tr> <td>240</td> <td>375VA</td> <td>pilot duty</td> </tr> </table>	Voltage	Amperage		24	125VA	pilot duty	120	375VA	pilot duty	240	375VA	pilot duty
Voltage	Amperage													
24	125VA	pilot duty												
120	375VA	pilot duty												
240	375VA	pilot duty												
DIELECTRIC STRENGTH	-----	750 VRMS open switch 1550 VRMS terminals to fitting												
LIFE AT RATED LOAD	-----	100,000 Cycles												
SWITCH CONFIGURATION	-----	SPST, at atmospheric pressure: CLOSED												



CUSTOMER NAME:

CUSTOMER P/N:

DRAWING DATE: April 14th, 2007

CHANGHENG P/N: YK-01H 000-363R261R