


NJ9226GK



ENGINEERING CODE
944LV95

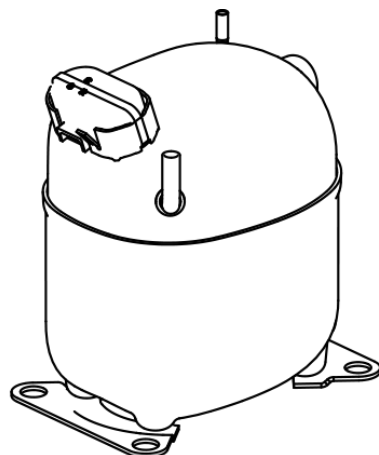

REFRIGERANT
R-404A



POWER SUPPLY
230 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSCR



STANDARD
EN12900



COOLING CAPACITY
1648 W



EFFICIENCY
1.68 W/W



DATA

GENERAL DATA

Model	NJ9226GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/230
HP	1+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	7.8 Ω at 25°C
Run Winding Resistance	2.12 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	27.5 A

MECHANICAL DATA

Displacement	21.71 cm ³
Oil Charge	750 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	20.7 Kg

ELECTRICAL COMPONENTS

Start Capacitor	88-108 µf/330 V
CSR CSIR BOX	Yes
Overload Protection	T0736/C9

EXTERNAL CHARACTERISTICS

Base Plate	LARGE
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	8 mm	SLANTED J	COPPER
Process	6.42 mm	VERTICAL	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	230 V
Tested Frequency	50 Hz
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	1648	1.68	978	4.44	49.48

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1231	1.63	754	3.55	31.92
-15	1589	1.90	838	3.85	41.53
-10	2016	2.20	916	4.17	53.15
-5	2512	2.57	979	4.48	66.91
0	3075	3.02	1020	4.78	82.96

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	991	1.27	780	3.63	29.21
-15	1291	1.47	877	4.03	38.40
-10	1648	1.68	978	4.44	49.48
-5	2059	1.91	1076	4.85	62.59
0	2525	2.17	1161	5.23	77.85


Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1254	1.25	1006	4.66	44.44
-5	1582	1.41	1125	5.16	56.87
0	1951	1.57	1243	5.63	71.34

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

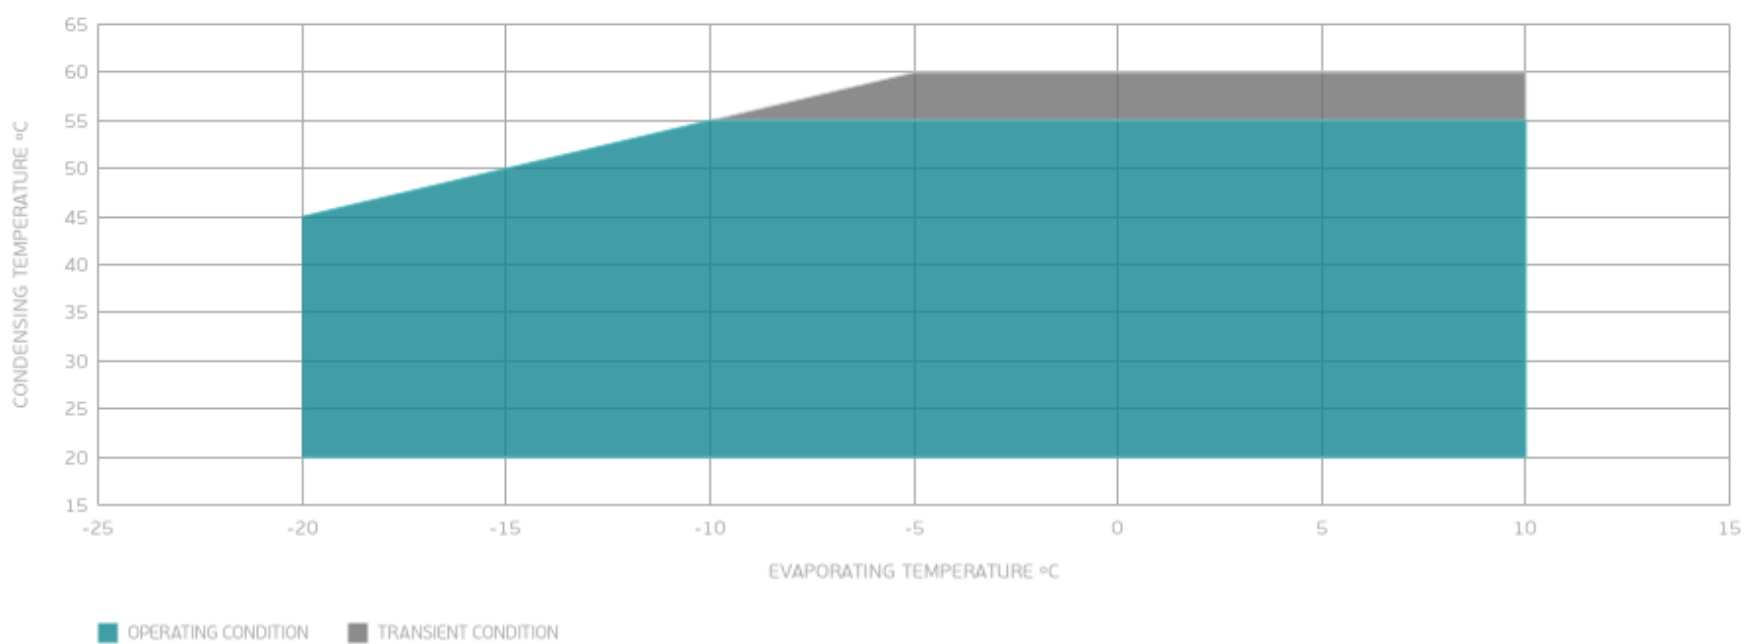

EXTERNAL DIMENSIONS

